



DER-16



D Series

1 Type

Octagon Type

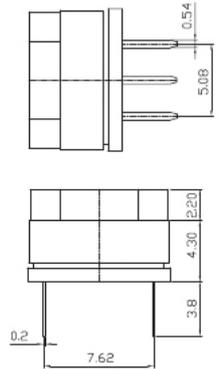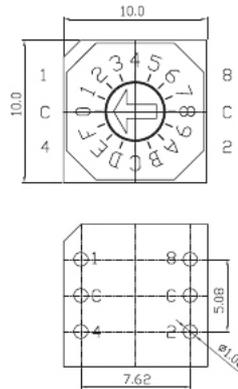


How to Order 选型表

Type	Actuators	Code	Position	Terminals	Solder Condition
1	2	3	4	5	6
ex) D	E	R	16	C	-

General Specification 产品性能

- | | |
|---|---|
| 1. Rating
工作电流, 电压 | Voltage 42V
150mA (Switching)
200mA (None-Switching) |
| 2. Contact Resistance
接触电阻 | 80mΩ Max |
| 3. Insulation Resistance
绝缘电阻 | 100MΩ Min |
| 4. Operating Force
操作力 | 700gf Max |
| 5. Life Cycle
使用寿命 | 10,000 steps |
| 6. Solder Condition
焊接方式 | Iron Soldering : 2s/340°C
Wave Soldering : 5s/280°C |
| 7. Sealing
防水系数 | IP67 (Dust & Water Proof)
* Except Cross Type of Actuator ("D" Type) |

2 Actuators 外观形式

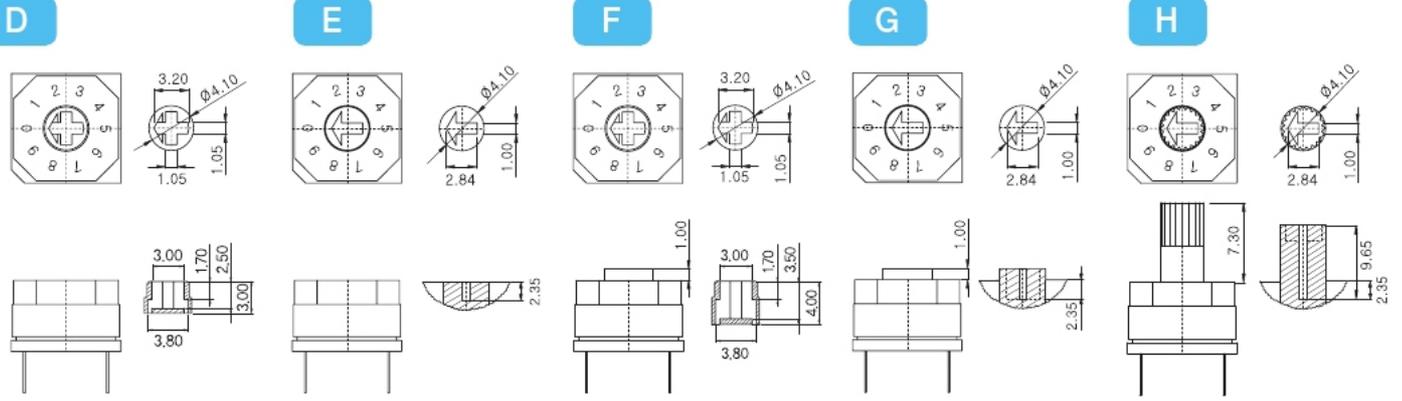

3 Code 编码表

See Page 37

4 Position 位数形式

4 Position

6 Position


8 Position

10 Position


16 Position

5 Terminals PIN角形式

- Standard Type



C (3×2 Ter')




6 Solder Condition 焊接方式

-
PCB Hole Type : Iron Soldering : 2s/340°C
Wave Soldering : 5s/280°C

T
Through Hole Reflow : Reflow Soldering : 10s/260°C
Iron Soldering : 2s/340°C
Wave Soldering : 5s/280°C


7 Packing 包装形式

- Tube Packing Q'ty : 50pcs / Tube

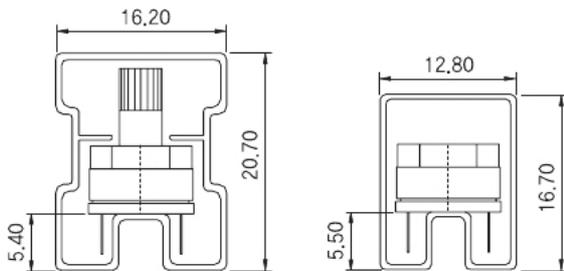


Accessories 配件

AC-100 **G**



* Applicable to only 'D' Actuators
* Should be mounted after soldering

BC-200 **G**



BC-200 **G**
L : 7.3mm

BC-201 **G**
L : 11.6mm

BC-202 **G**
L : 13.3mm

G : Gray R : Red K : Black
Y : Yellow B : Blue C : Clear